



LOPEN SUSPENDED

Versatile by Nature.

PRODUCT DESCRIPTION

MOUNTING	SUSPENDED
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	DIRECT
MATERIALS	ALUMINIUM

The LOPEN Suspended is a clean-cut continuous linear profile with outstanding performance and efficiency. Designed with simplicity and attention to detail in mind, this profile luminaire is the intelligent solution for compact yet powerful and energy-efficient lighting. The suspended linear lighting system Lopen enhances a contemporary feel of any architectural space, creating clean lines of light with its LED light source.

The Lopen enables the design hungry environments to have true freedom with its variation of mounting styles, combinations of connections and illuminated corners. The diverse range of lengths can be combined to create an intriguing design or simply blend in with the architecture.

PRODUCT CODE

LOPEN SUSPENDED DIRECT

L (mm)	Medium Output	
706	LED 1x16W / 1727 lm	11-E*1-F2-706-***-***-***
776	LED 1x18W / 1900lm	11-E*1-F2-776-***-***-***
846	LED 1x19W / 2072 lm	11-E*1-F2-846-***-***-***
916	LED 1x21W / 2245 lm	11-E*1-F2-916-***-***-***
986	LED 1x22W / 2418 lm	11-E*1-F2-986-***-***-***
1056	LED 1x24W / 2590 lm	11-E*1-F2-1056-***-***-***
1126	LED 1x25W / 2763 lm	11-E*1-F2-1126-***-***-***
1196	LED 1x27W / 2936 lm	11-E*1-F2-1196-***-***-***
1266	LED 1x28W / 3108 lm	11-E*1-F2-1266-***-***-***
1336	LED 1x30W / 3281 lm	11-E*1-F2-1336-***-***-***
1406	LED 1x32W / 3454 lm	11-E*1-F2-1406-***-***-***
1476	LED 1x33W / 3627 lm	11-E*1-F2-1476-***-***-***
1546	LED 1x35W / 3799 lm	11-E*1-F2-1546-***-***-***
1616	LED 1x36W / 3972 lm	11-E*1-F2-1616-***-***-***
1686	LED 1x38W / 4144 lm	11-E*1-F2-1686-***-***-***
1756	LED 1x39W / 4317 lm	11-E*1-F2-1756-***-***-***
1826	LED 1x41W / 4490 lm	11-E*1-F2-1826-***-***-***
1896	LED 1x42W / 4662 lm	11-E*1-F2-1896-***-***-***
1966	LED 1x44W / 4835 lm	11-E*1-F2-1966-***-***-***
2036	LED 1x46W / 5008 lm	11-E*1-F2-2036-***-***-***
2106	LED 1x47W / 5180 lm	11-E*1-F2-2106-***-***-***
2176	LED 1x49W / 5353 lm	11-E*1-F2-2176-***-***-***
2246	LED 1x50W / 5526 lm	11-E*1-F2-2246-***-***-***
2316	LED 1x52W / 5699 lm	11-E*1-F2-2316-***-***-***
2386	LED 1x53W / 5871 lm	11-E*1-F2-2386-***-***-***
2456	LED 1x55W / 6044 lm	11-E*1-F2-2456-***-***-***
2526	LED 1x56W / 6216 lm	11-E*1-F2-2526-***-***-***
2596	LED 1x58W / 6389 lm	11-E*1-F2-2596-***-***-***
2666	LED 1x60W / 6562 lm	11-E*1-F2-2666-***-***-***
2736	LED 1x61W / 6734 lm	11-E*1-F2-2736-***-***-***
2806	LED 1x63W / 6907 lm	11-E*1-F2-2806-***-***-***

Custom lengths also available, please contact us
*Luminous flux taken at 4000K Opal diffuser

OUTPUT

Low Output	Medium Output	High Output
------------	---------------	-------------

Low Output 11-E*1-F1-***-***-***-***
Medium Output 11-E*1-F2-***-***-***-***
High Output 11-E*1-F3-***-***-***-***
 Low output approximately 29% decrease in power & 28% decrease in lumens against Medium Output
 High output approximately 38% increase in power & 33% increase in lumens against Medium Output

CRI

80	90	97
----	----	----

80 11-E*1-F-***-***-***-***
 90 11-E*1-F-***-***-***-***
 97 11-E*1-F-***-***-***-***
 *CRI97 not available with office optics

COLOUR TEMPERATURE

2700K	3000K	4000K	5000K	TW 2700K-5000K
-------	-------	-------	-------	-------------------

2700 K 11-E*1-F-***-***-***-***
 3000 K 11-E*1-F-***-***-***-***
 4000 K 11-E*1-F-***-***-***-***
 5000 K 11-E*1-F-***-***-***-***
 TW 11-E*1-F-***-***-***-***

*Tunable White only available on High Output fittings with a length over 1266

CONTROL

NON DIM	DALI DIM	DALI2 DIM	CASAMBI
---------	----------	-----------	---------

NON DIM 11-E*1-F-***-***-***-***
 DALI DIM 11-E*1-F-***-***-***-***
 DALI 2 DIM 11-E*1-F-***-***-***-***
 CASAMBI DIM 11-E*1-F-***-***-***-***
 *EasyAir IoT on request

EMERGENCY

NO EMERGENCY	3 HOUR NON-REPORTING EMERGENCY	3 HOUR REPORTING EMERGENCY	3 HOUR SELF-TEST EMERGENCY
--------------	--------------------------------	----------------------------	----------------------------

No Emergency 11-E*1-F-***-***-***-***-0-***
 3 Hour Non Reporting EM 11-E*1-F-***-***-***-***-3-***
 3 Hour Reporting EM 11-E*1-F-***-***-***-***-4-***
 3 Hour Self-Test EM 11-E*1-F-***-***-***-***-5-***
 *Only available in sizes above 1266mm.



FINISH

BLACK	WHITE	GREY	CUSTOM RAL
-------	-------	------	------------

BLACK 11-E*1-F-***-***-***-***-D
 WHITE 11-E*1-F-***-***-***-***-C
 GREY 11-E*1-F-***-***-***-***-B
 CUSTOM RAL 11-E*1-F-***-***-***-***-RAL###

OPTICS

MICROPRISMATIC	OPAL	PRISMATIC	11-EF1-F-***-***-***-***
		OPAL	11-EH1-F-***-***-***-***
		ASYMMETRIC	11-EB1-F-***-***-***-***
		BLACK OPAL	11-EN1-F-***-***-***-***
		DROP PRISMATIC	11-EDF1-F-***-***-***-***
		DROP OPAL	11-EDO1-F-***-***-***-***
ASYMMETRIC	BLACK OPAL		
DROP PRISMATIC	DROP OPAL		

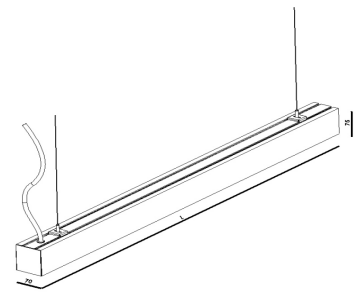



LOPEN SUSPENDED

Versatile by Nature.

PRODUCT DESCRIPTION

MOUNTING	SUSPENDED
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	DIRECT - INDIRECT
MATERIALS	ALUMINIUM

The LOPEN Suspended is a clean-cut continuous linear profile with outstanding performance and efficiency. Designed with simplicity and attention to detail in mind, this profile luminaire is the intelligent solution for compact yet powerful and energy-efficient lighting. The suspended linear lighting system Lopen enhances a contemporary feel of any architectural space, creating clean lines of light with its LED light source.

The Lopen enables the design hungry environments to have true freedom with its variation of mounting styles, combinations of connections and illuminated corners. The diverse range of lengths can be combined to create an intriguing design or simply blend in with the architecture.

PRODUCT CODE

LOPEN SUSPENDED DIRECT/INDIRECT

L (mm)	Medium Output	
706	LED 1x29W / 3473 lm	11-E*3-F2-706-***-***-***
776	LED 1x32W / 3858 lm	11-E*3-F2-776-***-***-***
846	LED 1x35W / 4244 lm	11-E*3-F2-846-***-***-***
916	LED 1x38W / 4630 lm	11-E*3-F2-916-***-***-***
986	LED 1x41W / 5016 lm	11-E*3-F2-986-***-***-***
1056	LED 1x44W / 5401 lm	11-E*3-F2-1056-***-***-***
1126	LED 1x47W / 5787 lm	11-E*3-F2-1126-***-***-***
1196	LED 1x50W / 6173 lm	11-E*3-F2-1196-***-***-***
1266	LED 1x53W / 6559 lm	11-E*3-F2-1266-***-***-***
1336	LED 1x56W / 6944 lm	11-E*3-F2-1336-***-***-***
1406	LED 1x60W / 7330 lm	11-E*3-F2-1406-***-***-***
1476	LED 1x63W / 7716 lm	11-E*3-F2-1476-***-***-***
1546	LED 1x66W / 8102 lm	11-E*3-F2-1546-***-***-***
1616	LED 1x69W / 8488 lm	11-E*3-F2-1616-***-***-***
1686	LED 1x72W / 8873 lm	11-E*3-F2-1686-***-***-***
1756	LED 1x75W / 9259 lm	11-E*3-F2-1756-***-***-***
1826	LED 1x78W / 9645 lm	11-E*3-F2-1826-***-***-***
1896	LED 1x81W / 10031 lm	11-E*3-F2-1896-***-***-***
1966	LED 1x85W / 10417 lm	11-E*3-F2-1966-***-***-***
2036	LED 1x88W / 10802 lm	11-E*3-F2-2036-***-***-***
2106	LED 1x91W / 11188 lm	11-E*3-F2-2106-***-***-***
2176	LED 1x94W / 11574 lm	11-E*3-F2-2176-***-***-***
2246	LED 1x97W / 11960 lm	11-E*3-F2-2246-***-***-***
2316	LED 1x100W / 12345 lm	11-E*3-F2-2316-***-***-***
2386	LED 1x103W / 12731 lm	11-E*3-F2-2386-***-***-***
2456	LED 1x106W / 13117 lm	11-E*3-F2-2456-***-***-***
2526	LED 1x109W / 13503 lm	11-E*3-F2-2526-***-***-***
2596	LED 1x113W / 13889 lm	11-E*3-F2-2596-***-***-***
2666	LED 1x116W / 14274 lm	11-E*3-F2-2666-***-***-***
2736	LED 1x119W / 14660 lm	11-E*3-F2-2736-***-***-***
2806	LED 1x122W / 15046 lm	11-E*3-F2-2806-***-***-***

Custom lengths also available, please contact us

*Luminous flux taken at 4000K Opal diffuser

OPTICS

MICROPRISMATIC	OPAL	PRISMATIC OPAL ASYMMETRIC BLACK OPAL DROP PRISMATIC DROP OPAL	11-EF3-F-***-***-***-*** 11-EH3-F-***-***-***-*** 11-EB3-F-***-***-***-*** 11-EN3-F-***-***-***-*** 11-EDF3-F-***-***-***-*** 11-EDO3-F-***-***-***-***
ASYMMETRIC	BLACK OPAL		
DROP PRISMATIC	DROP OPAL		

OUTPUT

Low Output	Medium Output	High Output	Low Output Medium Output High Output	11-E*3-F1-***-***-***-*** 11-E*3-F2-***-***-***-*** 11-E*3-F3-***-***-***-***
------------	---------------	-------------	--	---

Low output approximately 29% decrease in power & 28% decrease in lumens against Medium Output
High output approximately 33% increase in power & 33% increase in lumens against Medium Output

CRI

80	90	97	80 90 97	11-E*3-F-***-***-***-*** 11-E*3-F-***-***-***-*** 11-E*3-F-***-***-***-***
----	----	----	----------------	--

*CRI97 not available with office optics

COLOUR TEMPERATURE

2700K	3000K	4000K	5000K	TW 2700K-5000K	2700 K 3000 K 4000 K 5000 K TW	11-E*3-F-***-***-27-***-*** 11-E*3-F-***-***-30-***-*** 11-E*3-F-***-***-40-***-*** 11-E*3-F-***-***-50-***-*** 11-E*3-F-***-***-TW-***-***
-------	-------	-------	-------	-------------------	--	---

*Tunable White only available on High Output fittings with a length over 1266

CONTROL

NON DIM	DALI DIM	DALI2 DIM	CASAMBI	NON DIM DALI DIM DALI 2 DIM CASAMBI DIM	11-E*3-F-***-***-K-***-*** 11-E*3-F-***-***-J-***-*** 11-E*3-F-***-***-JA-***-*** 11-E*3-F-***-***-BL-***-***
---------	----------	-----------	---------	--	--

*EasyAir IoT on request

EMERGENCY

NO EMERGENCY	3 HOUR NON-REPORTING EMERGENCY	3 HOUR REPORTING EMERGENCY	3 HOUR SELF-TEST EMERGENCY	No Emergency 3 Hour Non Reporting EM 3 Hour Reporting EM 3 Hour Self-Test EM	11-E*3-F-***-***-0-***-*** 11-E*3-F-***-***-3-***-*** 11-E*3-F-***-***-4-***-*** 11-E*3-F-***-***-5-***-***
--------------	--------------------------------	----------------------------	----------------------------	---	--

*Only available in sizes above 1266mm.

FINISH

BLACK	WHITE	GREY	CUSTOM RAL	BLACK WHITE GREY CUSTOM RAL	11-E*3-F-***-***-B-***-*** 11-E*3-F-***-***-C-***-*** 11-E*3-F-***-***-A-***-*** 11-E*3-F-***-***-RAL###-***-***
-------	-------	------	------------	--------------------------------------	---

