



Nile60

The Playful.

PRODUCT DESCRIPTION

MOUNTING	SUSPENDED
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	DIRECT - INDIRECT - 260°
MATERIALS	ALUMINIUM

Minimalist and classic in design, the Nile is a clean cut tubular luminaire that can add a personality to your design. The clean aesthetics and satin diffuser will enhance any modern space allowing the light to add an extra layer of presence in the environment. Suspend it horizontally or vertically, at an obscure angle, or jazz it up with a red coloured suspension cable, the choice is yours.

Powered by LED COB technology, the tubular diffuser distributes soft and uniform light in an omni-directional style for a comfortable level of illumination whilst keeping the energy consumption in check. With 7 different lengths to choose from, the Nile allows for a comprehensive range of applications. Ideal as a creative feature luminaire for breakout spaces, reception areas and public areas.

PRODUCT CODE


The NILE can be specified with both CASAMBI and Philips EasyAir to increase user control.

NILE60 SUSPENDED

L (mm)

1408	LED	1x32W / 4138 lm	88-EH3-F1-1408-***-***
1478	LED	1x33W / 4345 lm	88-EH3-F1-1478-***-***
1548	LED	1x35W / 4552 lm	88-EH3-F1-1548-***-***
1618	LED	1x36W / 4759 lm	88-EH3-F1-1618-***-***
1688	LED	1x38W / 4966 lm	88-EH3-F1-1688-***-***
1758	LED	1x39W / 5173 lm	88-EH3-F1-1758-***-***
1828	LED	1x41W / 5380 lm	88-EH3-F1-1828-***-***
1898	LED	1x42W / 5586 lm	88-EH3-F1-1898-***-***
1968	LED	1x44W / 5793 lm	88-EH3-F1-1968-***-***
2038	LED	1x46W / 6000 lm	88-EH3-F1-2038-***-***
2108	LED	1x47W / 6207 lm	88-EH3-F1-2108-***-***
2178	LED	1x49W / 6414 lm	88-EH3-F1-2178-***-***
2248	LED	1x50W / 6621 lm	88-EH3-F1-2248-***-***
2318	LED	1x52W / 6828 lm	88-EH3-F1-2318-***-***
2388	LED	1x53W / 7035 lm	88-EH3-F1-2388-***-***
2458	LED	1x55W / 7242 lm	88-EH3-F1-2458-***-***
2528	LED	1x56W / 7448 lm	88-EH3-F1-2528-***-***
2598	LED	1x58W / 7655 lm	88-EH3-F1-2598-***-***
2668	LED	1x60W / 7862 lm	88-EH3-F1-2668-***-***
2738	LED	1x61W / 8069 lm	88-EH3-F1-2738-***-***
2808	LED	1x63W / 8276 lm	88-EH3-F1-2808-***-***

*Luminous flux taken at 4000K

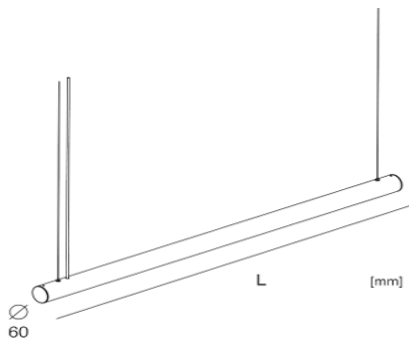

CRI

80	90	97	80	88-EH3-F1-***-g***-***
			90	88-EH3-F1-***-g***-***
			97	88-EH3-F1-***-g***-***

COLOUR TEMPERATURE

2700K	3000K	4000K	5000K	2700K	88-EH3-F1-***-27-***-***
				3000K	88-EH3-F1-***-30-***-***
				4000K	88-EH3-F1-***-40-***-***
				5000K	88-EH3-F1-***-50-***-***

CONTROL

NON DIM	DALI DIM	DALI 2 DIM	CASAMBI	NON DIM	88-EH3-F1-***-K-***-***
				DALI DIM	88-EH3-F1-***-J-***-***
				DALI 2 DIM	88-EH3-F1-***-JA-***-***
				CASAMBI DIM	88-EH3-F1-***-BL-***-***

*EasyAir IoT on request

EMERGENCY

NO EMERGENCY	3 HOUR NON-REPORTING REMOTE EMERGENCY	3 HOUR REPORTING REMOTE EMERGENCY	3 HOUR SELF-TEST REMOTE EMERGENCY	No Emergency	88-EH3-F1-***-E-0-***-***
				3 Hour Non Reporting	88-EH3-F1-***-E-7-***-***
				3 Hour Reporting EM	88-EH3-F1-***-E-8-***-***
				3 Hour Self-Test EM	88-EH3-F1-***-E-9-***-***

*Remote emergency available only

FINISH

BLACK	WHITE	RED	YELLOW	CUSTOM RAL	BLACK	88-EH3-F1-***-***-D-***-***
					WHITE	88-EH3-F1-***-***-C-***-***
					RED	88-EH3-F1-***-***-R-***-***
					YELLOW	88-EH3-F1-***-***-Y-***-***
					CUSTOM RAL	88-EH3-F1-***-***-RAL###-***-***