



# OKA SUSPENDED DIRECT

The Class Leader.

## PRODUCT DESCRIPTION

<b>MOUNTING</b>	SUSPENDED
<b>LIGHT SOURCE</b>	LED
<b>LIGHT DISTRIBUTION</b>	DIRECT - INDIRECT / DIRECT
<b>MATERIALS</b>	ALUMINIUM
<b>OPTICS</b>	PRISMATIC / OPAL

The OKA Suspended has all the attributes for setting a new standard for linear office lighting by making a statement in any modern office space. Designed with attention to detail, it will impress the purists with clean lines, homogeneous light and a proportionately designed suspension system.


The choice of 3 different colour temperatures suits any application and the light intensity can be dimmed with DALI. The Tunable White option allows the user to adjust the colour temperature contributing to the wellbeing of the workforce.

## PRODUCT CODE

### OKA SUSPENDED DIRECT

l (mm)	High Efficiency	
712mm	LED 16W / 1852 lm	52-E*1-F2-***-712-***
782mm	LED 18W / 2037 lm	52-E*1-F2-***-782-***
852mm	LED 19W / 2222 lm	52-E*1-F2-***-852-***
922mm	LED 21W / 2407 lm	52-E*1-F2-***-922-***
992mm	LED 22W / 2592 lm	52-E*1-F2-***-992-***
1062mm	LED 24W / 2777 lm	52-E*1-F2-***-1062-***
1132mm	LED 25W / 2962 lm	52-E*1-F2-***-1132-***
1202mm	LED 27W / 3147 lm	52-E*1-F2-***-1202-***
1272mm	LED 28W / 3332 lm	52-E*1-F2-***-1272-***
1342mm	LED 30W / 3518 lm	52-E*1-F2-***-1342-***
1412mm	LED 32W / 3703 lm	52-E*1-F2-***-1412-***
1482mm	LED 33W / 3888 lm	52-E*1-F2-***-1482-***
1552mm	LED 35W / 4073 lm	52-E*1-F2-***-1552-***
1622mm	LED 36W / 4258 lm	52-E*1-F2-***-1622-***
1692mm	LED 38W / 4443 lm	52-E*1-F2-***-1692-***
1762mm	LED 39W / 4628 lm	52-E*1-F2-***-1762-***
1832mm	LED 41W / 4813 lm	52-E*1-F2-***-1832-***
1902mm	LED 42W / 4998 lm	52-E*1-F2-***-1902-***
1972mm	LED 44W / 5184 lm	52-E*1-F2-***-1972-***
2042mm	LED 46W / 5369 lm	52-E*1-F2-***-2042-***
2112mm	LED 47W / 5554 lm	52-E*1-F2-***-2112-***
2182mm	LED 49W / 5739 lm	52-E*1-F2-***-2182-***
2252mm	LED 50W / 5924 lm	52-E*1-F2-***-2252-***
2322mm	LED 52W / 6109 lm	52-E*1-F2-***-2322-***
2392mm	LED 53W / 6294 lm	52-E*1-F2-***-2392-***
2462mm	LED 55W / 6479 lm	52-E*1-F2-***-2462-***
2532mm	LED 56W / 6664 lm	52-E*1-F2-***-2532-***
2602mm	LED 58W / 6850 lm	52-E*1-F2-***-2602-***
2672mm	LED 60W / 7035 lm	52-E*1-F2-***-2672-***
2742mm	LED 61W / 7220 lm	52-E*1-F2-***-2742-***
2812mm	LED 63W / 7405 lm	52-E*1-F2-***-2812-***

\* Luminous Flux taken with 4000K / Opal Diffuser



### OPTICS

MICROPRISMATIC	OPAL	PRISMATIC OPAL	52-E*1-F*-***-***-K-*** 52-E*1-F*-***-***-J-***
----------------	------	----------------	--

### CRI

80	90	80 90	52-E*1-F*-***-8***-*** 52-E*1-F*-***-9***-***
----	----	----------	--

### COLOUR TEMPERATURE

3000K	4000K	3000K 4000K TW	52-E*1-F*-***-30***-*** 52-E*1-F*-***-40***-*** 52-E*1-F*-***-TW***-***
TW 2700K-5000K			

### CONTROL

NON DIM	DALI DIM	NON DIM DALI DIM B. DALI DIM	52-E*1-F*-***-K-*** 52-E*1-F*-***-J-*** 52-E*1-F*-***-M-***
BLUETOOTH DALI DIM			

### EMERGENCY

NO EMERGENCY	3 HOUR EMERGENCY	0 HR 3 HR	52-E*1-F*-***-0-*** 52-E*1-F*-***-3-***
--------------	---------------------	--------------	--


### FINISH

WHITE	BLACK	WHITE BLACK SILVER	52-E*1-F*-***-***-C 52-E*1-F*-***-***-D 52-E*1-F*-***-***-B
SILVER			



# OKA SUSPENDED DIRECT INDIRECT

The Class Leader.

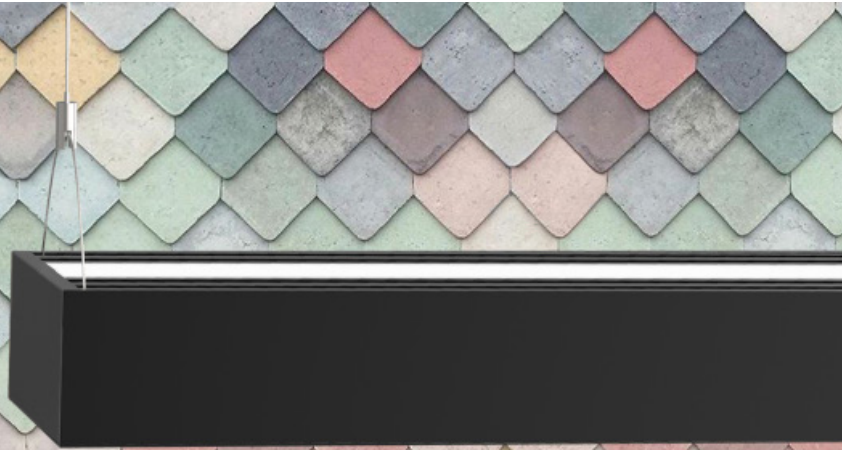

## PRODUCT DESCRIPTION

<b>MOUNTING</b>	SUSPENDED
<b>LIGHT SOURCE</b>	LED
<b>LIGHT DISTRIBUTION</b>	DIRECT - INDIRECT / DIRECT
<b>MATERIALS</b>	ALUMINIUM
<b>OPTICS</b>	PRISMATIC / OPAL

The OKA Suspended has all the attributes for setting a new standard for linear office lighting by making a statement in any modern office space. Designed with attention to detail, it will impress the purists with clean lines, homogeneous light and a proportionately designed suspension system.


The choice of 3 different colour temperatures suits any application and the light intensity can be dimmed with DALI. The Tunable White option allows the user to adjust the colour temperature contributing to the wellbeing of the workforce.

## PRODUCT CODE

### OKA SUSPENDED DIRECT - INDIRECT

l (mm)	High Efficiency	Product Code
712mm	LED 16W / 1852 lm	52-E*3-F2-***-712-***
782mm	LED 18W / 2037 lm	52-E*3-F2-***-782-***
852mm	LED 19W / 2222 lm	52-E*3-F2-***-852-***
922mm	LED 21W / 2407 lm	52-E*3-F2-***-922-***
992mm	LED 22W / 2592 lm	52-E*3-F2-***-992-***
1062mm	LED 24W / 2777 lm	52-E*3-F2-***-1062-***
1132mm	LED 25W / 2962 lm	52-E*3-F2-***-1132-***
1202mm	LED 27W / 3147 lm	52-E*3-F2-***-1202-***
1272mm	LED 28W / 3332 lm	52-E*3-F2-***-1272-***
1342mm	LED 30W / 3518 lm	52-E*3-F2-***-1342-***
1412mm	LED 32W / 3703 lm	52-E*3-F2-***-1412-***
1482mm	LED 33W / 3888 lm	52-E*3-F2-***-1482-***
1552mm	LED 35W / 4073 lm	52-E*3-F2-***-1552-***
1622mm	LED 36W / 4258 lm	52-E*3-F2-***-1622-***
1692mm	LED 38W / 4443 lm	52-E*3-F2-***-1692-***
1762mm	LED 39W / 4628 lm	52-E*3-F2-***-1762-***
1832mm	LED 41W / 4813 lm	52-E*3-F2-***-1832-***
1902mm	LED 42W / 4998 lm	52-E*3-F2-***-1902-***
1972mm	LED 44W / 5184 lm	52-E*3-F2-***-1972-***
2042mm	LED 46W / 5369 lm	52-E*3-F2-***-2042-***
2112mm	LED 47W / 5554 lm	52-E*3-F2-***-2112-***
2182mm	LED 49W / 5739 lm	52-E*3-F2-***-2182-***
2252mm	LED 50W / 5924 lm	52-E*3-F2-***-2252-***
2322mm	LED 52W / 6109 lm	52-E*3-F2-***-2322-***
2392mm	LED 53W / 6294 lm	52-E*3-F2-***-2392-***
2462mm	LED 55W / 6479 lm	52-E*3-F2-***-2462-***
2532mm	LED 56W / 6664 lm	52-E*3-F2-***-2532-***
2602mm	LED 58W / 6850 lm	52-E*3-F2-***-2602-***
2672mm	LED 60W / 7035 lm	52-E*3-F2-***-2672-***
2742mm	LED 61W / 7220 lm	52-E*3-F2-***-2742-***
2812mm	LED 63W / 7405 lm	52-E*3-F2-***-2812-***

\* Luminous Flux taken with 4000K / Opal Diffuser



### OPTICS

MICROPRISMATIC	OPAL	PRISMATIC OPAL	52-E*3-F-***-***-*** 52-E*3-F-***-***-***
----------------	------	----------------	--

### CRI

80	90	80	52-E*3-F-***-80-*** 52-E*3-F-***-90-***
----	----	----	--

### COLOUR TEMPERATURE

3000K	4000K	3000K	52-E*3-F-***-30-***
		4000K	52-E*3-F-***-40-***
		TW	52-E*3-F-***-TW-***
2700K-5000K			

### CONTROL

NON DIM	DALI DIM	NON DIM	52-E*3-F-***-K-***
		DALI DIM	52-E*3-F-***-J-***
		B. DALI DIM	52-E*3-F-***-M-***
BLUETOOTH DALI DIM			

### EMERGENCY

NO EMERGENCY	3 HOUR EMERGENCY	0 HR	52-E*3-F-***-0-***
		3 HR	52-E*3-F-***-3-***

### FINISH

WHITE	BLACK	WHITE	52-E*3-F-***-***-C
		BLACK	52-E*3-F-***-***-D
		SILVER	52-E*3-F-***-***-B
SILVER			

