



Circular Inward ø600 Surface

Benedito Design

Pendant Circular Inward ø600 Surface LED 39 LED neutral-white 4000K ON-OFF Black 2611lm

Technical features

- Luminaire total power: 39W
- Real lumens: 2611
- Real lm/W: 67
- Correlated Colour Temperature (CCT): LED neutral-white 4000K
- Lens / reflector angle: HORIZONTAL 101°
- UGR: <=22
- Structure finish: Black
- Diffuser material: Polycarbonate
- Diffuser finish: Opal
- Driver Brand: INVENTRONICS
- Voltage / frequency: 100-240V/50-60Hz
- Dimming protocol: ON-OFF/DALI
- Power Factor: 0.90
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 2281
- Luminance C90°G65°: 2258
- CRI: 90

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	36.4W	LED neutral-white 4000K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	20.2				
UGR lengthwise	20.1				

- Net weight (kg): 3.4
- Packaged weight (kg): 5.42
- Packaging: 700mm x 695mm x 100mm


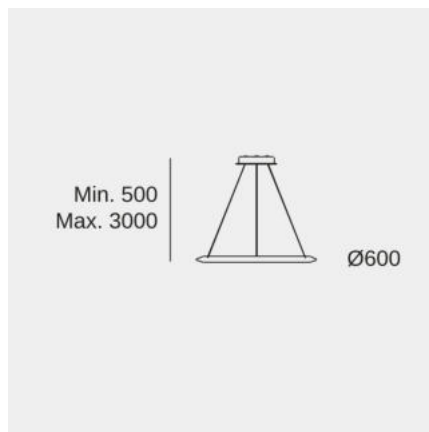


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

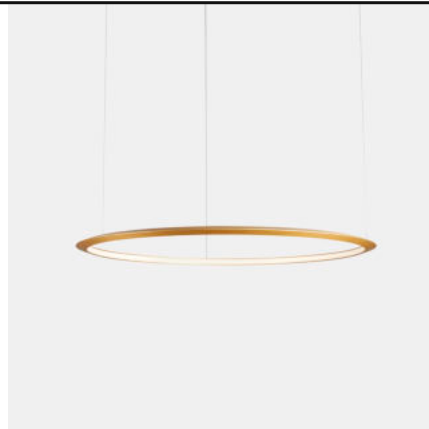

Circular Inward ø900 Surface

Benedito Design

Pendant Circular Inward ø900 Surface LED 53 LED neutral-white 4000K ON-OFF Black 2971lm

Technical features

- Luminaire total power: 53W
- Real lumens: 2971
- Real lm/W: 56
- Correlated Colour Temperature (CCT): LED neutral-white 4000K
- Lens / reflector angle: HORIZONTAL 111°
- UGR: <=19
- Structure finish: Black
- Diffuser material: Polycarbonate
- Diffuser finish: Opal
- Driver Brand: MEANWELL
- Voltage / frequency: 100-240V/50-60Hz
- Dimming protocol: ON-OFF
- Power Factor: 0.90
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 984
- Luminance C90°G65°: 984
- CRI: 90

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	49.6W	LED neutral-white 4000K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	17.4				
UGR lengthwise	17.4				

Net weight 5 (kg):
 Packaged weight 10 (kg):
 Packaging 961 mm x 958 mm x 95 mm

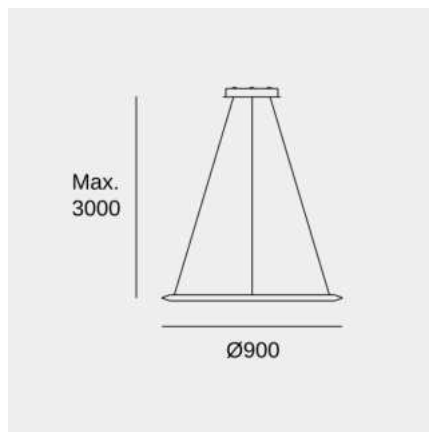


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Circular Inward ø1200 Surface

Benedito Design

Pendant Circular Inward ø1200 Surface LED 72 LED neutral-white 4000K ON-OFF Black 4352lm

Technical features

- Luminaire total power: 72W
- Real lumens: 4352
- Real lm/W: 60
- Correlated Colour Temperature (CCT): LED neutral-white 4000K
- Lens / reflector angle: HORIZONTAL 104°
- UGR: <=19
- Structure finish: Black
- Diffuser material: Polycarbonate
- Diffuser finish: Opal
- Driver Brand: MEANWELL
- Voltage / frequency: 100-240V/50-60Hz
- Dimming protocol: ON-OFF/DALI
- Power Factor: 0.90
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 903
- Luminance C90°G65°: 894
- CRI: 90

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	67.4W	LED neutral-white 4000K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	17.1				
UGR lengthwise	17.1				

- Net weight (kg): 6
- Packaged weight (kg): 13
- Packaging: 1290mm x 1256mm x 95mm

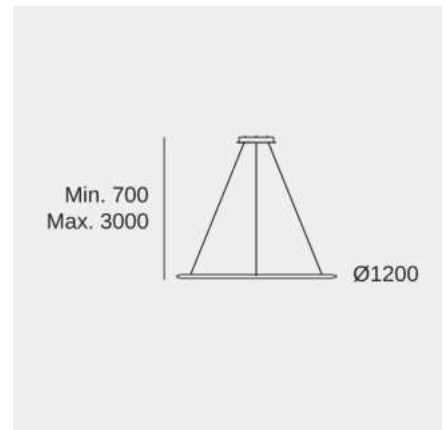


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Circular Inward ø2000 Surface

Benedito Design

Pendant Circular Inward ø2000 Surface LED 129 LED neutral-white 4000K ON-OFF Black 7583lm

Technical features

- Luminaire total power: 129W
- Real lumens: 7583
- Real lm/W: 59
- Correlated Colour Temperature (CCT): LED neutral-white 4000K
- Lens / reflector angle: HORIZONTAL 104°
- UGR: <=16
- Structure finish: Black
- Diffuser material: Polycarbonate
- Diffuser finish: Opal
- Driver Brand: MEANWELL
- Voltage / frequency: 100-240V/50-60Hz
- Dimming protocol: ON-OFF/DALI
- Power Factor: 0.90
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 559
- Luminance C90°G65°: 554
- CRI: 90

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	123.2W	LED neutral-white 4000K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	15.5				
UGR lengthwise	15.4				

- Net weight (kg): 12
- Packaged weight (kg): 16
- Packaging: 1900mm x 650mm x 150mm

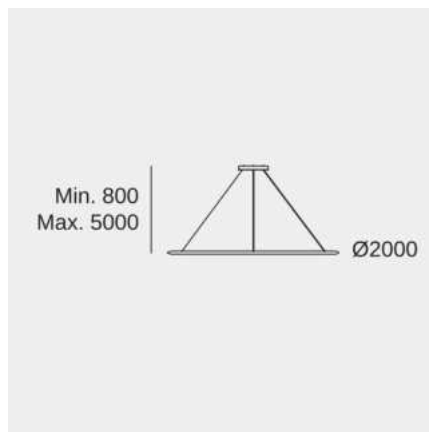


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Circular Inward ø3000 Surface

Benedito Design

Pendant Circular Inward ø3000 Surface LED 190 LED neutral-white 4000K ON-OFF Black 11025lm

Technical features

- Luminaire total power: 190W
- Real lumens: 11025
- Real lm/W: 58
- Correlated Colour Temperature (CCT): LED neutral-white 4000K
- Lens / reflector angle: HORIZONTAL 104°
- UGR: <=16
- Structure finish: Black
- Diffuser material: Polycarbonate
- Diffuser finish: Opal
- Driver Brand: MEANWELL
- Voltage / frequency: 100-240V/50-60Hz
- Dimming protocol: ON-OFF/DALI
- Power Factor: 0.90
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 359
- Luminance C90°G65°: 356
- CRI: 90

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	180.8W	LED neutral-white 4000K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	14.1				
UGR lengthwise	13.9				

- Net weight (kg): 18
- Packaged weight (kg): 32
- Packaging: 2740mm x 1000mm x 255mm

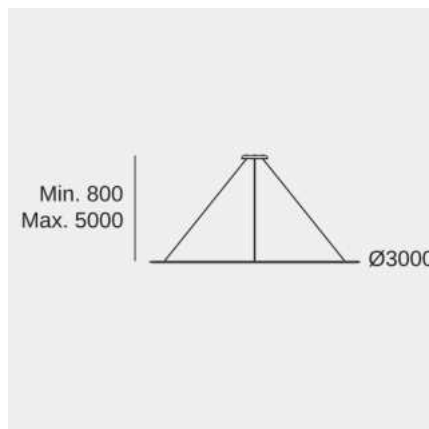


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.