



## Circular Vertical Side ø600 Surface

Benedito Design

Pendant Circular Vertical Side ø600 Surface LED 39 LED neutral-white 4000K ON-OFF Black 3674lm

### Technical features

- Luminaire total power: 39W
- Real lumens: 3674
- Real lm/W: 94
- Correlated Colour Temperature (CCT): LED neutral-white 4000K
- Lens / reflector angle: HORIZONTAL 121°
- UGR: <=22
- Structure finish: Black
- Diffuser material: Softdiffuser
- Diffuser finish: Opal
- Driver Brand: INVENTRONICS
- Voltage / frequency: 100-240V/50-60Hz
- Dimming protocol: ON-OFF/DALI
- Power Factor: 0.90
- Useful life: 50,000h L80B20
- Warranty: 5 años
- Easily recyclable luminaire



### Luminotechnic features

CRI: 90

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	36.4W	LED neutral-white 4000K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	21.8				
UGR lengthwise	21.8				

Net weight (kg): 3.4

Packaged weight (kg): 5.42

Packaging: 700mm x 695mm x 100mm

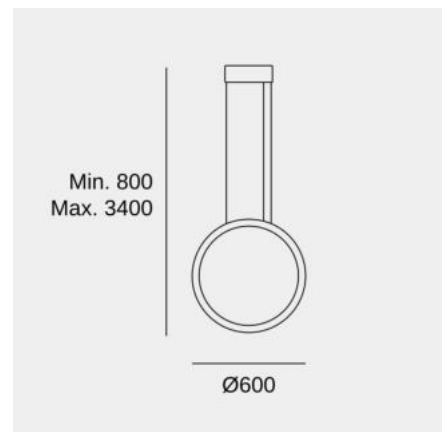


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



## Circular Vertical Side ø600 Surface

Benedito Design

Pendant Circular Vertical Side ø600 Surface LED 39 LED neutral-white 4000K ON-OFF Black 3674lm

### Logistics



x 1

Net weight (kg): 3.4

Packaged weight (kg): 5.42

Packaging: 700mm x 695mm x  
100mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



## Circular Vertical Side ø900 Surface

Benedito Design

Pendant Circular Vertical Side ø900 Surface LED 53 LED neutral-white 4000K ON-OFF Black 2992lm

### Technical features

- Luminaire total power: 53W
- Real lumens: 2992
- Real lm/W: 56
- Correlated Colour Temperature (CCT): LED neutral-white 4000K
- Lens / reflector angle: HORIZONTAL 115°
- UGR: <=19
- Structure finish: Black
- Diffuser material: Softdiffuser
- Diffuser finish: Opal
- Driver Brand: MEANWELL
- Voltage / frequency: 100-240V/50-60Hz
- Dimming protocol: ON-OFF/DALI
- Power Factor: 0.90
- Useful life: 50,000h L80B20
- Warranty: 5 años
- Easily recyclable luminaire



### Luminotechnic features

- Luminance C0°G65°: 1410
- Luminance C90°G65°: 1407
- CRI: 90

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	49.6W	LED neutral-white 4000K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	18.2				
UGR lengthwise	18.2				

- Net weight (kg): 5
- Packaged weight (kg): 10
- Packaging: 981mm x 958mm x 95mm

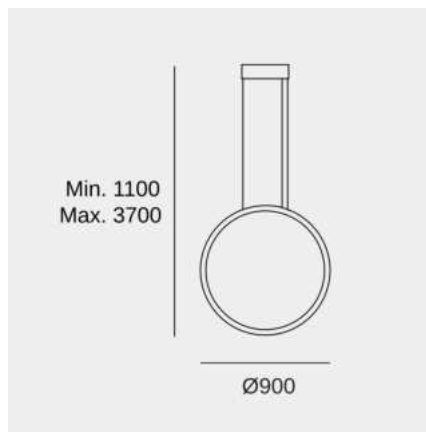


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



## Circular Vertical Side ø900 Surface

Benedito Design

Pendant Circular Vertical Side ø900 Surface LED 53 LED neutral-white 4000K ON-OFF Black 2992lm

### Logistics



x 1

Net weight (kg): 5

Packaged weight (kg): 10

Packaging: 981mm x 958mm x 95mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



## Circular Vertical Side ø1200 Surface

Benedito Design

Pendant Circular Vertical Side ø1200 Surface LED 72 LED neutral-white 4000K ON-OFF Black 6116lm

### Technical features

- Luminaire total power: 72W
- Real lumens: 6116
- Real lm/W: 85
- Correlated Colour Temperature (CCT): LED neutral-white 4000K
- Lens / reflector angle: HORIZONTAL 121°
- UGR: <=19
- Structure finish: Black
- Diffuser material: Softdiffuser
- Diffuser finish: Opal
- Driver Brand: MEANWELL
- Voltage / frequency: 100-240V/50-60Hz
- Dimming protocol: ON-OFF/DALI
- Power Factor: 0.90
- Useful life: 50,000h L80B20
- Warranty: 5 años
- Easily recyclable luminaire



### Luminotechnic features

- Luminance C0°G65°: 1693
- Luminance C90°G65°: 1693
- CRI: 90

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	67.4W	LED neutral-white 4000K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	18.7				
UGR lengthwise	18.7				

- Net weight (kg): 6
- Packaged weight (kg): 13
- Packaging: 1290mm x 1256mm x 95mm

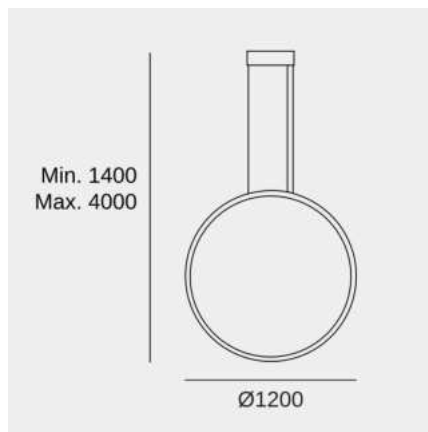


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



## Circular Vertical Side ø1200 Surface

Benedito Design

Pendant Circular Vertical Side ø1200 Surface LED 72 LED neutral-white 4000K ON-OFF Black 6116lm

### Logistics



x 1

Net weight (kg): 6

Packaged weight (kg): 13

Packaging: 1290mm x 1256mm x  
95mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.