



Luno Slim Pendant Small

Pendant Luno Slim Pendant Small 27.8 4000K CRI 90 ON-OFF / DALI-2 / PUSH White IP20 3158lm

Technical features

- Luminaire total power: 27.8W
- Real lumens: 3158
- Real lm/W: 114
- Correlated Colour Temperature (CCT): 4000K
- Lens / reflector angle: FLOOD 87°
- UGR: <=19
- Structure material: Aluminium
- Structure finish: White
- Diffuser material: Polycarbonate
- Diffuser finish: MICROPRISMATIC
- Driver Brand: TRIDONIC
- Voltage / frequency: 220-240V/50-60Hz
- Dimming protocol: ON-OFF / DALI-2 / PUSH
- Power Factor: 0.95
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 2309
- Luminance C90°G65°: 1855
- CRI: 90
- MacAdam steps: 3
- Photobiological risk: RG1

UGR		Lampholder	Quantity	Light source power (W)
S=0.250				
Ceiling / cavity	0.7	LED	1	23.1W
Walls	0.5			
Working Plane	0.2			
Room dimensions	X=4H, Y=8H			
UGR crosswise	18.4			
UGR lengthwise	18.8			


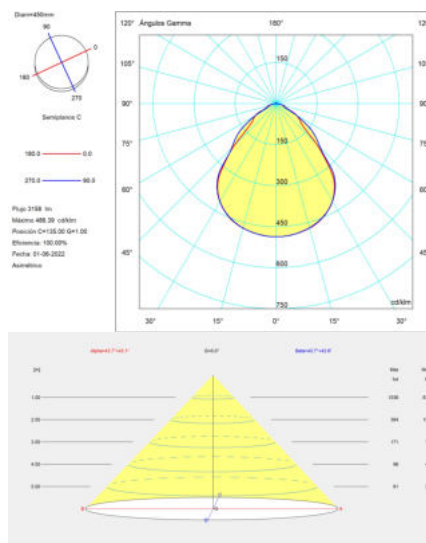


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

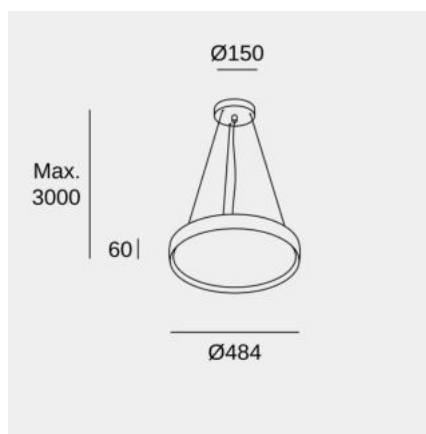

Luno Slim Pendant Medium

Pendant Luno Slim Pendant Medium 37.8 4000K CRI 90 ON-OFF / DALI-2 / PUSH White IP20 4114lm

Technical features

- Luminaire total power: 37.8W
- Real lumens: 4114
- Real lm/W: 109
- Correlated Colour Temperature (CCT): 4000K
- Lens / reflector angle: FLOOD 88°
- UGR: <=19
- Structure material: Aluminium
- Structure finish: White
- Diffuser material: Polycarbonate
- Diffuser finish: MICROPRISMATIC
- Driver Brand: TRIDONIC
- Voltage / frequency: 220-240V/50-60Hz
- Dimming protocol: ON-OFF / DALI-2 / PUSH
- Power Factor: 0.95
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 2849
- Luminance C90°G65°: 1752
- CRI: 90
- MacAdam steps: 3
- Photobiological risk: RG1

UGR		Lampholder	Quantity	Light source power (W)
S=0.250				
Ceiling / cavity	0.7	LED	1	34.7W
Walls	0.5			
Working Plane	0.2			
Room dimensions	X=4H, Y=8H			
UGR crosswise	18.2			
UGR lengthwise	18.7			



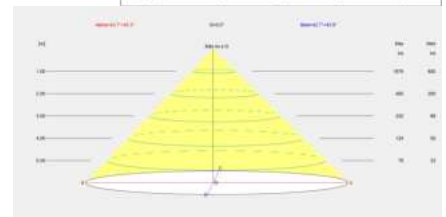


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

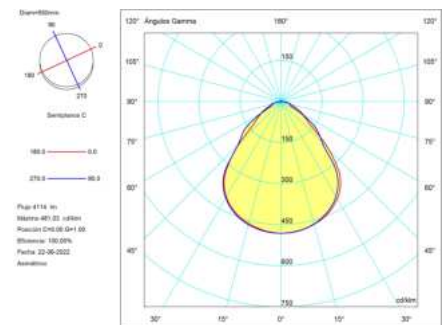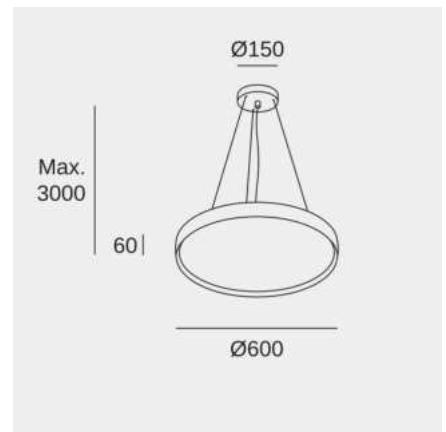

Luno Slim Pendant Large

Pendant Luno Slim Pendant Large 71.3 4000K CRI 90 ON-OFF / DALI-2 / PUSH White IP20 7194lm

Technical features

- Luminaire total power: 71.3W
- Real lumens: 7194
- Real lm/W: 101
- Correlated Colour Temperature (CCT): 4000K
- Lens / reflector angle: FLOOD 87°
- UGR: <=19
- Structure material: Aluminium
- Structure finish: White
- Diffuser material: Polycarbonate
- Diffuser finish: MICROPRISMATIC
- Driver Brand: TRIDONIC
- Voltage / frequency: 220-240V/50-60Hz
- Dimming protocol: ON-OFF / DALI-2 / PUSH
- Power Factor: 0.95
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 1610
- Luminance C90°G65°: 2273
- CRI: 90
- MacAdam steps: 3
- Photobiological risk: RG1

UGR		Lampholder	Quantity	Light source power (W)
S=0.250				
Ceiling / cavity	0.7	LED	1	67.2W
Walls	0.5			
Working Plane	0.2			
Room dimensions	X=4H, Y=8H			
UGR crosswise	18.5			
UGR lengthwise	17.8			


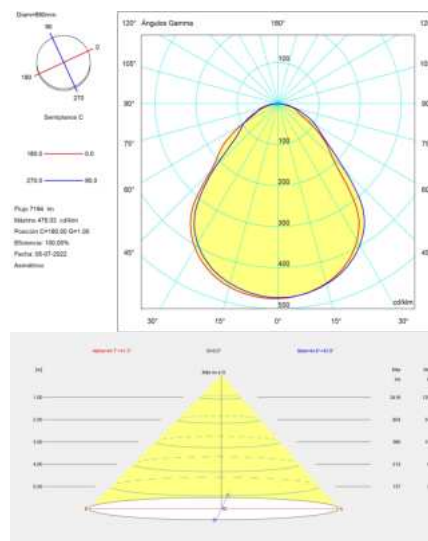


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

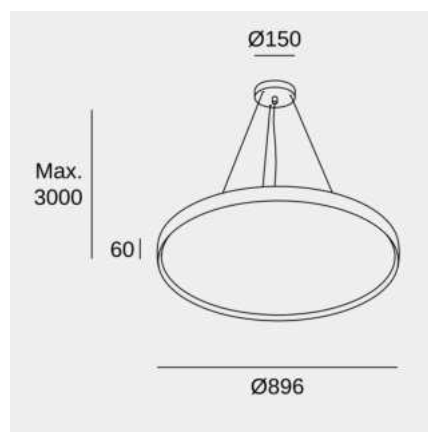

Luno Slim Pendant Extra Large

Pendant Luno Slim Pendant Extra Large 108.2 4000K CRI 90 ON-OFF / DALI-2 / PUSH White IP20 10257lm

Technical features

- Luminaire total power: 108.2W
- Real lumens: 10257
- Real lm/W: 95
- Correlated Colour Temperature (CCT): 4000K
- Lens / reflector angle: FLOOD 90°
- UGR: <=19
- Structure material: Aluminium
- Structure finish: White
- Diffuser material: Polycarbonate
- Diffuser finish: MICROPRISMATIC
- Driver Brand: TRIDONIC
- Voltage / frequency: 220-240V/50-60Hz
- Dimming protocol: ON-OFF / DALI-2 / PUSH
- Power Factor: 0.95
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 1134
- Luminance C90°G65°: 1525
- CRI: 90
- MacAdam steps: 3
- Photobiological risk: RG1

UGR		Lampholder	Quantity	Light source power (W)
S=0.250				
Ceiling / cavity	0.7	LED	1	100.8W
Walls	0.5			
Working Plane	0.2			
Room dimensions	X=4H, Y=8H			
UGR crosswise	17.7			
UGR lengthwise	17.1			

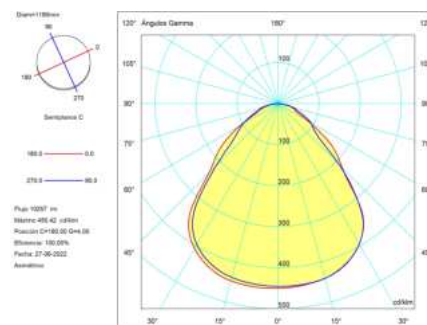
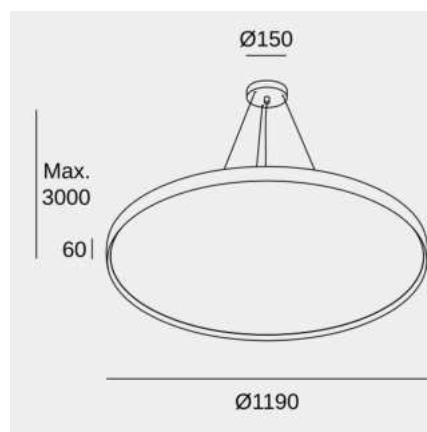


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.