



CLYDE SUSPENDED DIRECT

Ready When You Are.

PRODUCT DESCRIPTION

MOUNTING	SUSPENDED
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	DIRECT
MATERIALS	ALUMINIUM
LUMINAIRE TYPE	COMPLETE

The CLYDE is the ultimate comfort driven linear profile. Designed and manufactured in the UK, the CLYDE is the first Made in Britain certified luminaire in our product range. Thanks to its high build quality, excellent performance, and high visual comfort it is a perfect linear lighting for stimulating working environments and projects looking to use sustainable product options.

Used as an individual luminaire or a continuous linear lighting system, the CLYDE Suspended adds a contemporary feel to any workplace or architectural spaces. The direct only light distribution might be your preference for spaces where you don't wish to highlight the ceilings or spaces with dark ceilings. The muscular design of the CLYDE stands out and lends itself perfectly to made to measure linear lighting solutions with a bit of a presence in space.


PRODUCT CODE

CLYDE SUSPENDED

L (mm)	Low Output	Medium Output	High Output
568mm	LED 9.2W / 938 lm	LED 11.9W / 1158 lm	LED 14.4W / 1366 lm
848mm	LED 13.8W / 1407 lm	LED 17.9W / 1737 lm	LED 21.6W / 2049 lm
1128mm	LED 18.4W / 1876 lm	LED 23.8W / 2315 lm	LED 28.8W / 2731 lm
1408mm	LED 23.0W / 2345 lm	LED 29.8W / 2894 lm	LED 36.0W / 3414 lm
1688mm	LED 27.6W / 2814 lm	LED 35.7W / 3473 lm	LED 43.2W / 4097 lm
2248mm	LED 36.8W / 3752 lm	LED 47.6W / 4631 lm	LED 57.6W / 5463 lm

*Luminous Flux taken with 4000K 1 Opal Diffuser

- 83-E*1-F1-568-***-***-*
- 83-E*1-F1-848-***-***-*
- 83-E*1-F1-1128-***-***-*
- 83-E*1-F1-1408-***-***-*
- 83-E*1-F1-1688-***-***-*
- 83-E*1-F1-2248-***-***-*
- 83-E*1-F2-568-***-***-*
- 83-E*1-F2-848-***-***-*
- 83-E*1-F2-1128-***-***-*
- 83-E*1-F2-1408-***-***-*
- 83-E*1-F2-1688-***-***-*
- 83-E*1-F2-2248-***-***-*
- 83-E*1-F3-568-***-***-*
- 83-E*1-F3-848-***-***-*
- 83-E*1-F3-1128-***-***-*
- 83-E*1-F3-1408-***-***-*
- 83-E*1-F3-1608-***-***-*
- 83-E*1-F3-2248-***-***-*



OPTICS

MICROPRISMATIC	OPAL	QUAD	PRISMATIC OPAL QUAD	83-EF1-F*-***-***-***-*	83-EH1-F*-***-***-***-*	83-EG1-F*-***-***-***-*
----------------	------	------	---------------------------	-------------------------	-------------------------	-------------------------

CRI

CRI 80	CRI 90	CRI 80 CRI 90	83-E*1-F*-***-g***-***-*	83-E*1-F*-***-g***-***-*
--------	--------	------------------	--------------------------	--------------------------

COLOUR TEMPERATURE

3000K	4000K	TW 2700-6500K	3000K 4000K TW	83-E*1-F*-***-30-***-***-*	83-E*1-F*-***-40-***-***-*	83-E*1-F*-***-TW-***-***-*
-------	-------	------------------	----------------------	----------------------------	----------------------------	----------------------------

CONTROL

NON DIM	DALI DIM	NON DIM DALI DIM	83-E*1-F*-***-***-K-***-*	83-E*1-F*-***-***-J-***-*
---------	----------	---------------------	---------------------------	---------------------------

*DALI-DIM as standard

EMERGENCY

NO EMERGENCY	3 HOUR EMERGENCY	0 HR 3 HR	83-E*1-F*-***-***-0-***-*	83-E*1-F*-***-***-3-***-*
--------------	---------------------	--------------	---------------------------	---------------------------

*Emergency available from 1128mm

FINISH

WHITE	BLACK	SILVER	WHITE BLACK SILVER	83-E*1-F*-***-***-C-***-*	83-E*1-F*-***-***-D-***-*	83-E*1-F*-***-***-B-***-*
-------	-------	--------	--------------------------	---------------------------	---------------------------	---------------------------

LAST UPDATED JANUARY 2024





CLYDE SUSPENDED

Ready When You Are.

PRODUCT DESCRIPTION

MOUNTING	SUSPENDED
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	DIRECT
MATERIALS	ALUMINIUM
LUMINAIRE TYPE	SYSTEM


The CLYDE is the ultimate comfort driven linear profile. Designed and manufactured in the UK, the CLYDE is the first Made in Britain certified luminaire in our product range. Thanks to its high build quality, excellent performance, and high visual comfort it is a perfect linear lighting for stimulating working environments and projects looking to use sustainable product options.

Used as an individual luminaire or a continuous linear lighting system, the CLYDE Suspended adds a contemporary feel to any workplace or architectural spaces. The direct only light distribution might be your preference for spaces where you don't wish to highlight the ceilings or spaces with dark ceilings. The muscular design of the CLYDE stands out and lends itself perfectly to made to measure linear lighting solutions with a bit of a presence in space.

PRODUCT CODE

SYSTEM START / END MODULE

L (mm)	Low Output	
566mm	LED 9.2W / 938 lm	83-EA*1-F93-***-**-*
846mm	LED 13.8W / 1407 lm	83-EA*1-F14-***-**-*
1126mm	LED 18.4W / 1876 lm	83-EA*1-F18-***-**-*
1406mm	LED 23.0W / 2345 lm	83-EA*1-F23-***-**-*
1686mm	LED 27.6W / 2814 lm	83-EA*1-F28-***-**-*
2246mm	LED 36.8W / 3752 lm	83-EA*1-F37-***-**-*
Medium Output		
566mm	LED 11.9W / 1158 lm	83-EA*1-F11-***-**-*
846mm	LED 17.9W / 1737 lm	83-EA*1-F17-***-**-*
1126mm	LED 23.8W / 2315 lm	83-EA*1-F24-***-**-*
1406mm	LED 29.8W / 2894 lm	83-EA*1-F29-***-**-*
1686mm	LED 35.7W / 3473 lm	83-EA*1-F34-***-**-*
2246mm	LED 47.6W / 4631 lm	83-EA*1-F46-***-**-*
High Output		
566mm	LED 14.4W / 1366 lm	83-EA*1-F13-***-**-*
846mm	LED 21.6W / 2049 lm	83-EA*1-F20-***-**-*
1126mm	LED 28.8W / 2731 lm	83-EA*1-F27-***-**-*
1406mm	LED 36.0W / 3414 lm	83-EA*1-F35-***-**-*
1686mm	LED 43.2W / 4097 lm	83-EA*1-F41-***-**-*
2246mm	LED 57.6W / 5463 lm	83-EA*1-F54-***-**-*



SYSTEM CENTRAL MODULE

L (mm)	Low Output	
564mm	LED 9.2W / 938 lm	83-EB*1-F93-***-**-*
844mm	LED 13.8W / 1407 lm	83-EB*1-F14-***-**-*
1124mm	LED 18.4W / 1876 lm	83-EB*1-F18-***-**-*
1404mm	LED 23.0W / 2345 lm	83-EB*1-F23-***-**-*
1684mm	LED 27.6W / 2814 lm	83-EB*1-F28-***-**-*
2244mm	LED 36.8W / 3752 lm	83-EB*1-F37-***-**-*
Medium Output		
564mm	LED 11.9W / 1158 lm	83-EB*1-F11-***-**-*
844mm	LED 17.9W / 1737 lm	83-EB*1-F17-***-**-*
1124mm	LED 23.8W / 2315 lm	83-EB*1-F24-***-**-*
1404mm	LED 29.8W / 2894 lm	83-EB*1-F29-***-**-*
1684mm	LED 35.7W / 3473 lm	83-EB*1-F34-***-**-*
2244mm	LED 47.6W / 4631 lm	83-EB*1-F46-***-**-*
High Output		
564mm	LED 14.4W / 1366 lm	83-EB*1-F13-***-**-*
844mm	LED 21.6W / 2049 lm	83-EB*1-F20-***-**-*
1124mm	LED 28.8W / 2731 lm	83-EB*1-F27-***-**-*
1404mm	LED 36.0W / 3414 lm	83-EB*1-F35-***-**-*
1684mm	LED 43.2W / 4097 lm	83-EB*1-F41-***-**-*
2244mm	LED 57.6W / 5463 lm	83-EB*1-F54-***-**-*

* Luminous Flux taken with 4000K / Microprismatic Diffuser

OPTICS

MICROPRISMATIC	OPAL	QUAD	PRISMATIC OPAL QUAD	83-E*F1-F**-* 83-E*H1-F**-* 83-E*G1-F**-*
----------------	------	------	---------------------------	---

CRI

CRI 80	CRI 90	CRI 80 CRI 90	83-E**1-F**-* 83-E**1-F**-*
--------	--------	------------------	--------------------------------

COLOUR TEMPERATURE

3000K	4000K	TW 2700-6500K	3000K 4000K 2700-6500K	83-E**1-F**-*30-* 83-E**1-F**-*40-* 83-E**1-F**-*TW-*
-------	-------	------------------	------------------------------	---

CONTROL


NON DIM	DALI DIM	NON DIM DALI DIM	83-E**1-F**-*K* 83-E**1-F**-*J* <small>*DALI-DIM as standard</small>
---------	----------	---------------------	--

EMERGENCY

NO EMERGENCY	3 HOUR EMERGENCY	0 HR 3 HR	83-E**1-F**-*0* 83-E**1-F**-*3* <small>*Emergency available from 1124mm</small>
--------------	---------------------	--------------	---

FINISH

WHITE	BLACK	SILVER	WHITE BLACK SILVER	83-E**1-F**-*C 83-E**1-F**-*D 83-E**1-F**-*B
-------	-------	--------	--------------------------	--

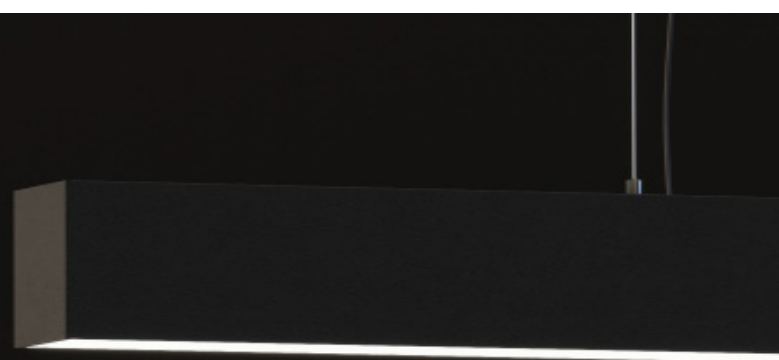

CLYDE SUSPENDED

Ready When You Are.

PRODUCT DESCRIPTION

MOUNTING	SUSPENDED
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	DIRECT
MATERIALS	ALUMINIUM
LUMINAIRE TYPE	SHAPES

The CLYDE is the ultimate comfort driven linear profile. Designed and manufactured in the UK, the CLYDE is the first Made in Britain certified luminaire in our product range. Thanks to its high build quality, excellent performance, and high visual comfort it is a perfect linear lighting for stimulating working environments and projects looking to use sustainable product options.

Used as an individual luminaire or a continuous linear lighting system, the CLYDE Suspended adds a contemporary feel to any workplace or architectural spaces. The direct only light distribution might be your preference for spaces where you don't wish to highlight the ceilings or spaces with dark ceilings. The muscular design of the CLYDE stands out and lends itself perfectly to measure linear lighting solutions with a bit of a presence in space.

PRODUCT CODE

COMPLETE 'T' LUMINAIRE

L (mm)	Low Output	Medium Output	High Output	Product Code	Diagram
1140 x 600	LED 27.6W / 2814 lm	LED 35.7W / 3473 lm	LED 43.2W / 4097 lm	83-E*1-FTL-***-0-*	
1140 x 600	LED 27.6W / 2814 lm	LED 35.7W / 3473 lm	LED 43.2W / 4097 lm	83-E*1-FTM-***-0-*	
1140 x 600	LED 27.6W / 2814 lm	LED 35.7W / 3473 lm	LED 43.2W / 4097 lm	83-E*1-FTH-***-0-*	

COMPLETE 'L' LUMINAIRE

L (mm)	Low Output	Medium Output	High Output	Product Code	Diagram
600 x 600	LED 18.4W / 1876 lm	LED 23.8W / 2316 lm	LED 28.8W / 2732 lm	83-E*1-FLL-***-0-*	
600 x 600	LED 18.4W / 1876 lm	LED 23.8W / 2316 lm	LED 28.8W / 2732 lm	83-E*1-FLM-***-0-*	
600 x 600	LED 18.4W / 1876 lm	LED 23.8W / 2316 lm	LED 28.8W / 2732 lm	83-E*1-FLH-***-0-*	

COMPLETE 'X' LUMINAIRE

L (mm)	Low Output	Medium Output	High Output	Product Code	Diagram
1140 x 1140	LED 36.8W / 3752 lm	LED 47.6W / 4630 lm	LED 57.6W / 5462 lm	83-E*1-FXL-***-0-*	
1140 x 1140	LED 36.8W / 3752 lm	LED 47.6W / 4630 lm	LED 57.6W / 5462 lm	83-E*1-FXM-***-0-*	
1140 x 1140	LED 36.8W / 3752 lm	LED 47.6W / 4630 lm	LED 57.6W / 5462 lm	83-E*1-FXH-***-0-*	

SYSTEM 'T' LUMINAIRE

L (mm)	Low Output	Medium Output	High Output	Product Code	Diagram
1140 x 600	LED 27.6W / 2814 lm	LED 35.7W / 3473 lm	LED 43.2W / 4097 lm	83-EB*1-FTL-***-0-*	
1140 x 600	LED 27.6W / 2814 lm	LED 35.7W / 3473 lm	LED 43.2W / 4097 lm	83-EB*1-FTM-***-0-*	
1140 x 600	LED 27.6W / 2814 lm	LED 35.7W / 3473 lm	LED 43.2W / 4097 lm	83-EB*1-FTH-***-0-*	

SYSTEM 'L' LUMINAIRE

L (mm)	Low Output	Medium Output	High Output	Product Code	Diagram
600 x 600	LED 18.4W / 1876 lm	LED 23.8W / 2316 lm	LED 28.8W / 2732 lm	83-EB*1-FLL-***-0-*	
600 x 600	LED 18.4W / 1876 lm	LED 23.8W / 2316 lm	LED 28.8W / 2732 lm	83-EB*1-FLM-***-0-*	
600 x 600	LED 18.4W / 1876 lm	LED 23.8W / 2316 lm	LED 28.8W / 2732 lm	83-EB*1-FLH-***-0-*	

SYSTEM 'X' LUMINAIRE

L (mm)	Low Output	Medium Output	High Output	Product Code	Diagram
1140 x 1140	LED 36.8W / 3752 lm	LED 47.6W / 4630 lm	LED 57.6W / 5462 lm	83-EB*1-FXL-***-0-*	
1140 x 1140	LED 36.8W / 3752 lm	LED 47.6W / 4630 lm	LED 57.6W / 5462 lm	83-EB*1-FXM-***-0-*	
1140 x 1140	LED 36.8W / 3752 lm	LED 47.6W / 4630 lm	LED 57.6W / 5462 lm	83-EB*1-FXH-***-0-*	

OPTICS

MICROPRISMATIC	OPAL	QUAD	PRISMATIC	Product Code
			OPAL	83-E*1-F**-*0-*
			QUAD	83-EB*1-F**-*0-*
				83-EH*1-F**-*0-*
				83-EBH*1-F**-*0-*
				83-EG*1-F**-*0-*
				83-EBG*1-F**-*0-*

CRI

CRI 80	CRI 90	Product Code
		83-E*1-F**-*0-*
		83-EB*1-F**-*0-*
		83-E*1-F**-*0-*
		83-EB*1-F**-*0-*

COLOUR TEMPERATURE

3000K	4000K	TW 2700-6500K	Product Code
			83-E*1-F**-*30-0-*
			83-EB*1-F**-*30-0-*
			83-E*1-F**-*40-0-*
			83-EB*1-F**-*40-0-*
			83-E*1-F**-*TW-0-*
			83-EB*1-F**-*TW-0-*

CONTROL

NON DIM	DALI DIM	Product Code
		83-E*1-F**-*K0-*
		83-EB*1-F**-*K0-*
		83-E*1-F**-*J0-*
		83-EB*1-F**-*J0-*

*DALI-DIM as standard

FINISH

WHITE	BLACK	SILVER	Product Code
			83-E*1-F**-*0-C
			83-EB*1-F**-*0-C
			83-E*1-F**-*0-D
			83-EB*1-F**-*0-D
			83-E*1-F**-*0-B
			83-EB*1-F**-*0-B